


The advanced provider of professional wireless communication

HYT
AMERICA, INC.

TC-610

Professional Water Resistant Two-Way Radio

The TC-610 is ideal for construction, industrial, & other applications looking for affordable yet reliable communications in a compact & durable design. Its IP66-rated water protection make it extremely useful for jobs that may encounter wet environments during the work day or may need to wash the radio after use in a dirty environment. The TC-610 has a 2000mAh Li-Ion battery & the choice of either a yellow/black or all-black colors.

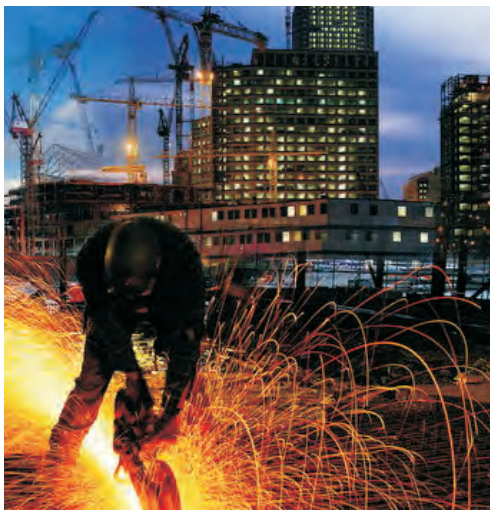

IP66-Rated Protection Against Water and Dirt

Powerful Audio and Wide Communication Range

High-Capacity 2000mAh Li-Ion Battery

All-Black Version Available for Discrete Applications

Easy-Grip Design Prevents Drops

www.hytafrica.com

TC-610

Professional Two-way Radio

Technical Highlights

- IP66-Rated Water & Dust Protection**
 Protects against water intrusion from stream of water measuring 1.6 inches.
- Unique Easy-Grip Design**
 The unique easy-grip design provides increased security against dropping.
- High-Capacity 2000 mAh Li-Ion Battery**
 TC-610 has long battery life (over 14 hours) with a high capacity battery.
- All-Black Version Available for Discrete Applications**
 The TC-610 also comes in All-Black color for when the application requires discretion such as for Casinos, Funeral Escorts, Security, and Hotels.
- Patented Battery Latch**
 The unique battery latch design prevents separation from battery when dropped.
- Voice Operated Transmit (VOX)**
 Hands-free transmit is possible, when paired with an applicable accessory.

Main Features

- High / Low Power Switchable
- Battery Save & Low Battery Alert
- Programmable Channel Spacing (Wide / Narrow Band Selectable)
- LED Battery Gauge
- Time-Out Timer
- TX Admit
- CTCSS / CDCSS Encode & Decode
- Data Operated Squelch
- Selectable Squelch Level (0-9)
- Channel Scan
- PC Programmable
- Wired Clone
- ATIS

General

Frequency Range (MHz)	VHF: 136-174 UHF: 400-420*, 450-470
Channel Capacity	16
Channel Spacing (kHz)	25 kHz / 12.5 kHz
PLL Channel Stepping (kHz)	5 kHz, 6.25 kHz
Operating Voltage (V)	7.4 V
RF Power Output (W)	5W/2W (VHF) 4W/2W (UHF)
Battery	2000 mAh (Li-Ion)
Battery Life (5-5-90 duty cycle)	Over 14 Hours
Frequency Stability (ppm)	± 2.5
Operating Temperature (F°)	-4° ~ +122° (F°)
Antenna Impedance (Ω)	50
Dimensions	4.68 in. x 2.16 in. x 1.30 in.
Weight (with antenna & battery)	9.70 oz.

**Frequencies Marked with an Asterisk(*) are for Export Only.
 This is not a submersible radio. Full immersion in water is not covered by warranty.
 All specifications are tested according to TIA/EIA-603, and subject to change without notice due to continuous development. More detailed specs available upon request.*

Recommended Applications

- Construction
- Manufacturing
- Warehousing & Industrial
- Campus & Property Management
- Hospitality & Entertainment
- Ports



Accessories

Standard Accessories	Antenna	MCU Charger CH10A03	Belt Clip BC12
	Li-Ion Battery (2000mAh) BL2001	Power Supply PS1037(UL)	Strap RO03

Featured Optional Accessories

Note: The TC-610 uses different audio accessories than the TC-610P.

<p>Li-ion battery (2000mAh) BL2001</p>	<p>MCU rapid-rate multi-unit charger for Li-ion Ni-MH batteries MCA02</p>	<p>Six-unit switching power (with UL power cord) PS7001 Vehicle Adapter CHV09</p>	<p>Noise-Canceling Remote Speaker Microphone (IF56) SM13M1</p>	<p>Light-weight, Behind-the-Head earpiece with in-Line PTT & VOX ECM11</p>
<p>Noise-Canceling Remote Speaker Microphone (Antenna Applicable) SM13M2</p>	<p>Light-weight, Single-Muff Headset with in-Line PTT & VOX ECM12</p>	<p>Remote speaker microphone SM08M3</p>	<p>Receive-only Earpiece with Transparent Acoustic Tube (for use with remote speaker microphone) ESS08</p>	<p>Receive-only Earbud (for use with remote speaker microphone) ESS07</p>
<p>Heavy weight high-quality noise-canceling & VOX headset ECM13</p>	<p>Light Weight, Throat-Vibrating Earpiece ELM01</p>	<p>D-earset with in-Line PTT & microphone & VOX EHM15</p>	<p>Earpiece with on-MIC PTT & VOX & Transparent Acoustic Tube EAM12</p>	<p>2-Wire Surveillance Earpiece with VOX & Transparent Acoustic Tube (black) EAM13</p>
<p>Behind-the-head, noise-canceling & VOX headset ECM14</p>	<p>Ear Canal Bone Induction Earpiece EBM01</p>	<p>D-earset with boom microphone & in-Line PTT & VOX EHM16</p>	<p>Earbud with on-MIC PTT & VOX ESM11</p>	<p>3-Wire Surveillance Earpiece with Transparent Acoustic Tube (black/beige) EAM16 / EAM15</p>
<p>Earbud with on-MIC PTT & VOX ESM12</p>	<p>★ Programming Cable (COM port) PC19 Programming Cable (USB to Serial Port) PC26</p>			

Your Local Dealer

FCC Approved Bands: (136-174MHz)
 FCC ID Number R74TC-610V2
 FCC Approved Bands: (450-470MHz)
 FCC ID Number R74TC-610U2



HYT America, Inc.
 3315 Commerce Parkway, Miramar, Florida 33025
 Tel: 800-845-1230 Fax: 954-846-1672
 Web: <http://www.hyta.com>

SHENZHEN HYT SCIENCE & TECHNOLOGY CO., LTD.
 HYT is the registered trademark of Shenzhen HYT Science & Technology Co., Ltd. © 2009 HYT, Co., Ltd. All Rights Reserved.
 HYT retains the right to change the product design and specifications. Should any printing mistake occur, HYT will not bear relevant responsibility. Some slight differences between real product and the product indicated by the printing materials may occur.